



British International Trading Co.



www.info@bitcindia.in



British International Trading Co.

COMPACT AC AXIAL FAN



Specification

Model No.	Bearing	Voltage	Frequency	Current	Speed	Input Power	Air Flow	Static Pressure	Noise
BITC	Sleeve / Ball	VAC	Hz	mA	RPM	W	CFM	mm H ₂ O	dBA
120 x 120 x 38 mm									
A12038AM-BT-PB	Ball	230	50 / 60	0.12 / 0.11	2650 / 2950	20 / 18	85 / 110	6.4 / 7.6	44 / 48
A12038AM-ST-PB	Sleeve	230	50 / 60	0.11 / 0.10	2600 / 2900	22 / 20	80 / 105	6.4 / 7.6	43 / 48
Ø 172 x 150 x 51 mm									
A21725AM-BW-PB	Ball	230	50 / 60	0.23 / 0.20	2600 / 2900	35 / 33	180 / 200	12.2 / 9.7	54 / 58
A21725AM-SW-PB	Sleeve	230	50 / 60	0.22 / 0.21	2500 / 2800	37 / 35	175 / 180	12.2 / 9.7	52 / 55
Ø 220 x 60 mm									
A22060AM-BW-PB	Ball	230	50	0.41	2350	63	360	22	55



British International Trading Co.

AC AXIAL FAN METAL BLADE



□ 225 x 80 mm



□ 280 x 80 mm



□ 120 x 38 mm



Ø 172 x 150 x 55 mm


Specification

Model No.	Bearing	Voltage	Frequency	Current	Speed	Input Power	Air Flow	Static Pressure	Noise
BITC	Sleeve / Ball	VAC	Hz	mA	RPM	W	CFM	mm H ₂ O	dBA
120 x 120 x 38 mm									
A12038AM-BT-MB	Ball	230	50 / 60	0.14 / 0.13	2600 / 2900	22 / 21	106 / 120	7.6 / 7.0	46 / 50
Ø 172 x 150 x 55 mm									
A15055AM-BW-MB	Ball	230	50 / 60	0.30 / 0.28	2600 / 2900	45 / 41	191 / 224	8 / 12	48 / 52
225 x 225 x 80 mm									
A22580AM-BW-MB	Ball	230	50 / 60	0.27 / 0.31	2500 / 2700	62 / 76	540 / 596	14	59 / 61
280 x 280 x 80 mm									
A28080AM-BW-MB	Ball	230	50 / 60	0.48 / 0.68	2500 / 2700	110 / 150	1060 / 1150	14	68 / 70



British International Trading Co.

SHADED POLE MOTOR C Frame Type

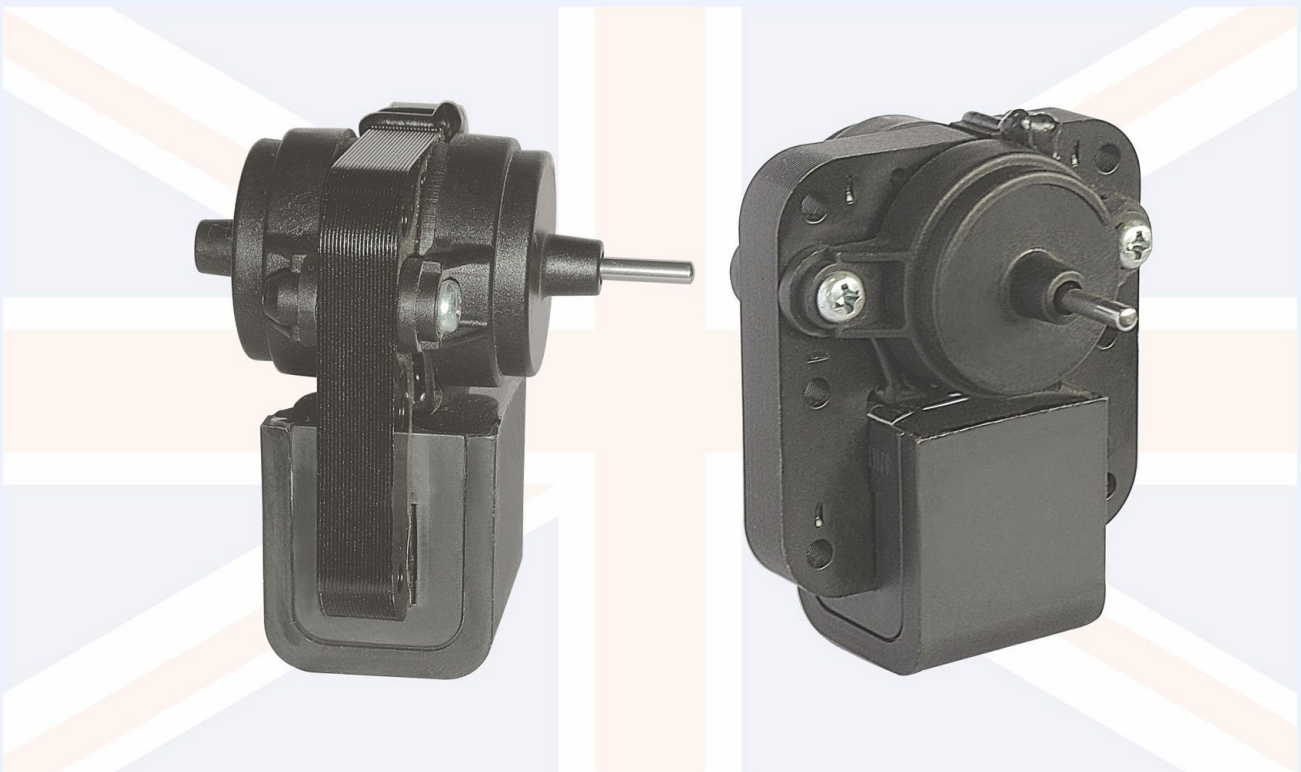


61 x 61 x 10 mm

Specification								
Model No.	Voltage	Frequency	Current	Speed	Watt	Air Flow	Static Pressure	Noise
BITC	(VAC)	(Hz)	(mA)	(RPM)	(W)	(CFM)	(mm H ₂ O)	(dBA)
A6110A-SW - 10	230	50	90	2650	8.5	70	6	35
A6125A-SW - 25	230	50	290	2300	33	150	10	40



British International Trading Co.

Shaded Pole Motor Q FRAME TYPE

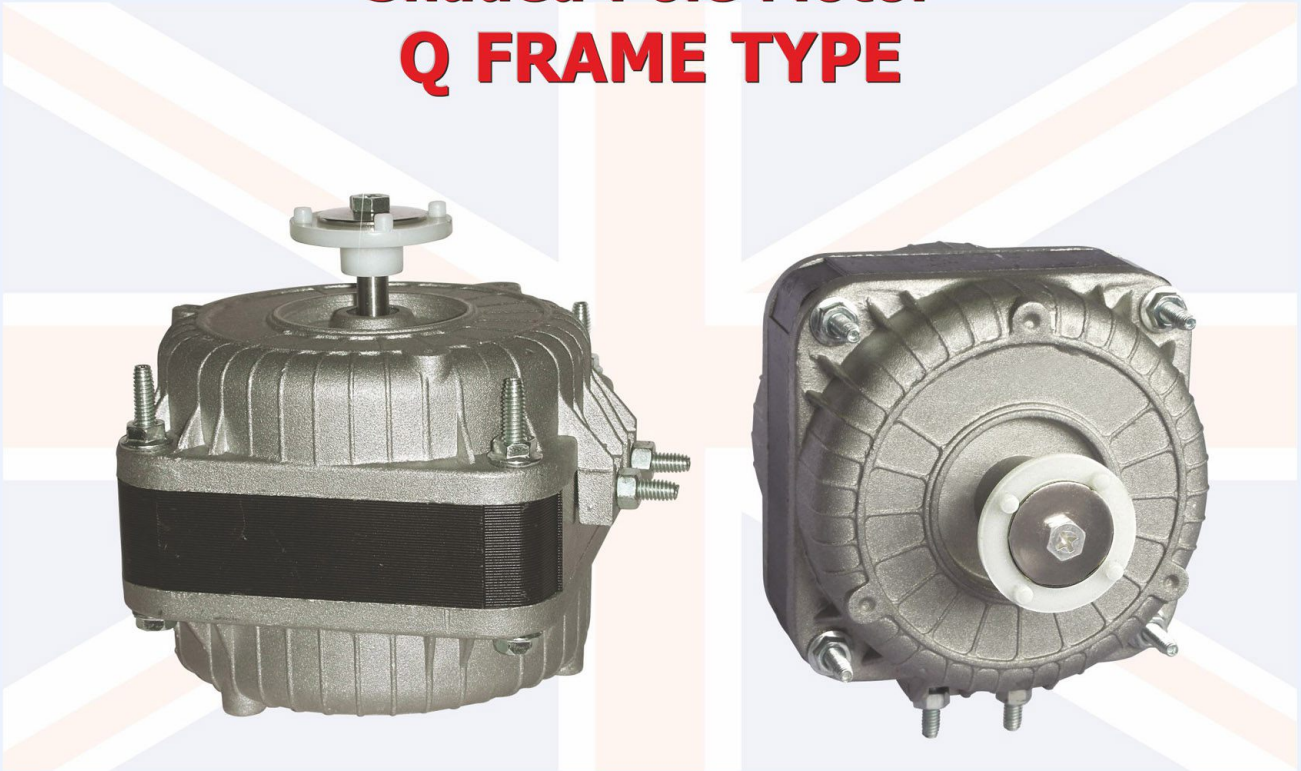

5, 7, 10, 16, 18, 25, 34, Watt

Specification


Model No.	Poles	Voltage	Frequency	Input	Output	Speed	Fan Blade	Rotation
BITC		VAC	Hz	Watt	Watt	RPM	Impeller	
A8313A-SW - 5	4	230	50 Hz	32	5	1300	200	CCW
A8320A-SW - 7	4	230	50 Hz	37	7	1300	230	CCW
A8320A-SW - 10	4	230	50 Hz	43	10	1300	230	CCW
A8325A-SW - 16	4	230	50 Hz	60	16	1300	254	CCW
A8330A-SW - 18	4	230	50 Hz	69	18	1300	254	CCW
A8340A-SW - 25	4	230	50 Hz	90	25	1300	300	CCW
A8345A-SW - 34	4	230	50 Hz	110	35	1300	300	CCW



British International Trading Co.

ACCESSORIES

Aluminium Impeller

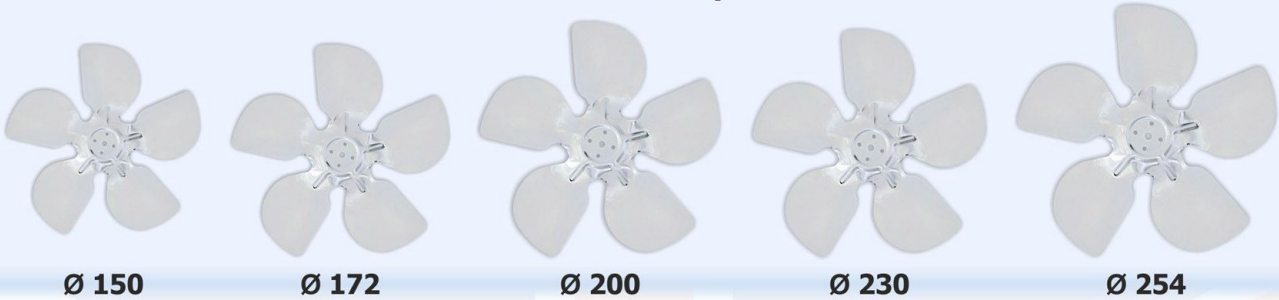


Plastic Impeller



Metal Stand (C Motor)



Metal Stand (Q Motor)

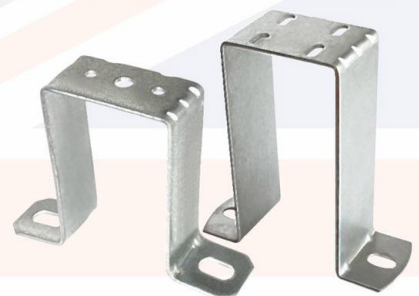

Plastic Finger Guard



Metal Finger Guard

